


TCG800-NG

Natural Gas CHP Unit

Standard Basic Module - Open Type

- Highly efficient gas engine and AC synchronous alternator
- Gas safety train and gas protection device against leakage
- Water/water and exhaust/water heat exchanger
- Heating water and jacket water circulation system
- Advanced engine control system, including: ignition system, detonation control system, speed control system, air/fuel ratio control system and cylinder temp. protection system
- Air transfer protection system
- Ventilation fan, electric inlet and outlet shutter
- Industrial silencer reduces the noise by 12-20dB(A)
- Multi-functional control system with easy operation
- Data communication interfaces integrated into control system
- Monitoring battery voltage and charging automatically
- Auto refilling oil system
- Bus interface for connecting to higher level control unit

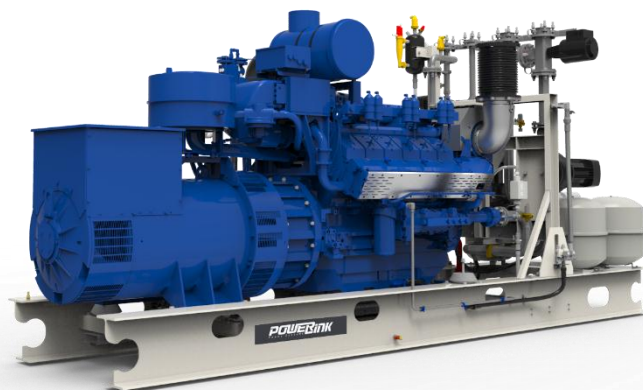

Structure and control cabinet

Structure type	Open type
Container painting	High-class paint
Electrical control cabinet	Integrated ,IP54
Noise level@1m, dB(A)	102.6
@7m, dB(A)	89.4
@10m, dB(A)	84.2

Dimension and weight

Dimension (LxWxH) , mm	5400x1700x2190
Weight, kg	13000

Special statement :

- 1、 The technical data are based on natural gas with a lower calorific value of 36MJ/Nm³. The technical data indicated is based on standard conditions according to ISO8528/1, ISO3046/1 and BS5514/1.
- 2、 The technical data is measured in standard conditions:
Absolute atmospheric pressure: 100kPa
Ambient temperature: 25°C
Relative air humidity: 30%
- 3、 Rating adaptation at ambient conditions acc to DIN ISO 3046/1.
The tolerance for the specific fuel consumption is + 5 % at rated output.
- 4、 Technical data above are just for standard product ,and may be subject to change. As this document is used only for presale reference, take the specification supplied by PowerLink before ordering as final.

Power and efficiency@50Hz

Electric power -kW	800	Electric efficiency	42.4%
Heat power-kW	855	Heat efficiency	45.3%
Input power-kW	1887	Total efficiency	87.7%

Fuel and emission

Fuel type	Natural gas
Methane number	MN > 80
Low heat value (KWh/m ³)	10.0
Gas density (Kg/m ³)	0.8
Fuel consumption @100% load, m ³ /h	189
Supply gas pressure range, kPa	10~20
Emission without catalytic converter	
NOx, mg/Nm ³	≤500
CO, mg/Nm ³	≤300
Emission with catalytic converter (optional)	
NOx, mg/Nm ³	≤250

TCG800-NG

Natural Gas CHP Unit

Standard Basic Module + Acoustic Attenuated Container (Optional)



Dimension and Noise Level

Optional container (mm) (customized container modeling service available)	<input type="checkbox"/>	12192*2438*2896
	<input type="checkbox"/>	12192*3000*2896
	<input type="checkbox"/>	13500*3000*2896
	<input type="checkbox"/>	15000*3200*3000
	<input type="checkbox"/>	17000*3200*3000
Noise Level@ 1m, dB(A)		88.2
@ 7m, dB(A)		74.5
@ 10m, dB(A)		69.4

- Outdoor application enabled, weatherproof and dustproof, corrosion preventive
- Environmental friendly low emission
- Modular designed and manufactured for plug and play
- Low noise does not affect the surrounding environment



CHP Unit performance data and manufacturing technology

CHP unit model	TCG800-NG	Telephone interference factor(TIF)	≤50
Electric output power (kW)	800	Telephone harmonious factor(THF)	≤2%, as perBS4999
Heat output power (kW)	855	<p>Manufacturing technology</p> <ul style="list-style-type: none"> ● Special welded base frame, inner vibration isolators and design for whole lifting ● With high quality paint, enduring brightness as well resistance against abrasion and defacing ● Installation manual, operation and maintenance manual circuit diagram <p>Standards and certificate</p> <ul style="list-style-type: none"> ● ISO3046, ISO8528, GB2820 ● BS5000PT99, AS1359, IEC34 ● ISO9001:2008 quality system certification 	
CHP unit electric efficiency	42.4%		
CHP unit heat efficiency	45.3%		
CHP unit total efficiency	87.7%		
Hot water production @inlet 70°C/outlet 90°C[t/h	34.9		
Overload runtime at 1.1xSe(hour)	1		
Steady-state voltage deviation	≤±1%		
Transient-state voltage deviation	-15%~20%		
Voltage recovery time(s)	≤4		
Voltage unbalance	1%		
Steady-state frequency regulation	±0.5%		
Transient -state frequency regulation	±5%		
Frequency recovery time(s)	≤3		
Steady-state frequency band	0.5%		
Recovery time response(s)	0.5		

AC alternator performance data

Alternator model	LSA50.1M6	Voltage	Power
Rated output power (kW)	820	380V	820kW
Power factor	0.8	400V	820kW
Rated current @ 400V and 100% load (A)	1480	415V	820kW
Excitation system	Brushless	440V	820kW
THF (BS EN60034- 1)	<2%		
Bearing number	2		
Winding material	100% copper		
Wiring connection	Star		
Rotor insulation class	H		
Winding pitch	2/3		
A.V.R. model	R450		
Voltage fluctuation(no load to full load)	± 0.5%		
Housing protection	IP23		
TIF (NEMA MG 1-22)	<50		
Excitation method	AREP		
Rated ambient temperature(°C)	40		
Rated stator temperature rise(°C)	125		

Efficient gas engine

General data

NO. of		16
Engine type		4-stroke, turbo charged, lean burn
Cylinder arrangement		V-form, 60°
Bore x stroke	mm	132×160
Displacement	L	35
Compression ratio		12: 1
Rated speed	rpm	1500
Rated output power	kW	820
Rotation direction		Anti-clockwise viewed on flywheel

Cooling system

Total coolant capacity	m ³	61
Total coolant flow	m ³ /h	55
Max. coolant exit temperature	°C	92
Max. coolant entry temperature	°C	84
Charge coolant flow	m ³ /h	10
Charge coolant exit temperature	°C	46
Charge coolant entry temperature	°C	40
Coolant type	Mixture of 50% Inhibited ethylene glycol or propylene glycol and 50% clean fresh water. Lower ambient temp, higher content of antifreeze.	

Induction/exhaust system

Combustion air flow	kg/h	4199
Exhaust flow	kg/h	4354
Max. exhaust temp. after turbo	°C	457
Max. exhaust back pressure	mbar	50
Max. suction restriction	mbar	100

Fuel control system

Gas train, Including:	ball valves
	filters
	gas pressure gauge
	safety solenoid valves
	constant pressure regulator etc
	gas pressure relief valve

Lubrication system

Oil temperature	°C	88
Max. consumption	g/kWh	0.2
Oil type	Single grade	
Oil pump	Gear driven	

Energy balance

Load		100%
Mechanical power	kW	880
Coolant heat	kW	405
Exhaust heat up to 120°C	kW	450
Energy input	kW	1887

Ignition system

Ignition type	Electronic ignition system	
Polarity	Negative earth	
Spark plug	Separate for every cylinder	

Fuel consumption

100% load	m ³ /h	189
75% load	m ³ /h	146
50% load	m ³ /h	103

PCC-300 control system

Open control system is adopted with touch screen display , and various functions, including: engine protection and control, paralleling between gensets or gensets and mains, and CHP control functions, as well as communication functions, etc.

Main functions	
<ul style="list-style-type: none"> - Engine monitor: coolant, lubrication, exhaust, battery - Supply gas circuit monitor: pressure, temperature and CH4 content - Auto paralleling and load share - Voltage and PF control - Alternator data: U, I, Hz, kW, kVA, kVAr, PF, kWh, kVAh - Mains data: U, I, Hz, kW, kVAr, PF 	<ul style="list-style-type: none"> - Modbus communication protocol based on RS232 and RS485 interfaces - SMS message - Internet connection and USB 2.0 interface - 10-inch touch screen - Internet monitor, auto orientation and cloud communication - 1000 history events log
Advantages	
<ul style="list-style-type: none"> - Accordant with consumer requirement - Complete control project - Convenient remote monitor and service 	<ul style="list-style-type: none"> - Simplified engine start/stop control - Enhanced stability and safety

Standard protection functions	Standard control functions	
Alternator protection <ul style="list-style-type: none"> - 2xReverse power - 2xOverload - 4xOvercurrent - 1xOvervoltage - 1xUndervoltage - 1xOver/under frequency - 1xUnbalanced current 	Power control <ul style="list-style-type: none"> - RPM control(synchronization) - Power control(grid connection) - Load share(island) 	Voltage control <ul style="list-style-type: none"> - Voltage tracking (synchronization) - Voltage control(island) - PF control(grid connection) - Reactive power share (island)
	Lubrication control <ul style="list-style-type: none"> - Auto refilling - Warning and monitoring 	Pump control <ul style="list-style-type: none"> - Cooling system - Emergency radiator
Busbar/mains protection <ul style="list-style-type: none"> - 1xOvervoltage - 1xUndervoltage - 1xOver/under frequency - 1xPhase sequence - 1xROCOF alarm 	Fan control <ul style="list-style-type: none"> - Ventilation for engine room - Radiator fan - Emergency radiator fan 	Valve control <ul style="list-style-type: none"> - Cooling system - Heating system - Emergency radiator
	Engine protection <ul style="list-style-type: none"> - Various routine and customized protection functions - Monitoring 	

Standard configuration

Engine	Alternator	Canopy and base	Electrical cabinet
Gas engine Ignition system Lambda controller Electronic governor actuator Electrical start motor Battery system Auto charging system Detonation control system Cylinder temp. protection system Coupling	AREP AC alternator H class insulation IP23 protection AVR voltage regulator PF control	Steel monocoque base frame Engine bracket Vibration isolators Alternator base	Air circuit breaker Paralleling control system 10-inch touch screen Communication interfaces Electrical switch cabinet Lighting system Smoke alarm system
Gas supply system	Lubrication system	Standard voltage	Induction/ exhaust system
Gas safety train Air/fuel mixer	Oil filter Daily auxiliary oil tank Auto refilling oil system New and used oil tank (Only applicable to container , two inch with the daily oil tank)	380/220V 400/230V 415/240V 440/254V	Air filter Exhaust silencer Exhaust bellows Gas flowmeter Gas leakage protection(Only applicable to canopy and container)
Heat exchange system	Service and documents		
Exhaust heat exchanger Jacket water circulation pump Jacket water heat exchanger Mixture circulation pump Intercooler radiator Expansion tank, Shut-off valve Three-way auto proportional valve	Tools package Installation and operation manual Maintenance manual Software manual Parts manual	Engine operation and maintenance manual Gas quality specification Control system manual After service guide Standard package	

Optional configuration

Engine	Alternator	Lubrication system
Jacket water radiator Jacket water heater	Space heater Treatments against humidity and corrosion	
Electrical system	Exhaust system	Service and documents
RCD Grounding bar	Three-way catalytic converter	Service tools Maintenance and service parts
Voltage	Gas supply system	Exhaust gas using
200V220V 230V240V	Gas flow gauge	Exhaust gas evaporator LiBr refrigerator